

City of Cheyenne - Purchasing 2101 O'Neil Avenue, Room 309 Cheyenne, WY 82001 307-773-1045 tbarttelbort@cheyennecity.org

## ADDENDUM NUMBER TWO BID E-22-21

To: All Prospective Bidders and all others concerned

From: City of Cheyenne, Purchasing Manager, TJ Barttelbort

Date: March 25, 2021

Subject: Addendum Number Two to Bid E-22-21 for furnishing One (1) New 2021-2022

<sup>3</sup>/<sub>4</sub> Ton Crew Cab (4 Door) Full Size Pickup Truck (Traffic Division Build), One (1) New 2021-2022 <sup>3</sup>/<sub>4</sub> Ton Regular Cab Full Size Pickup Truck, (Facilities Maintenance Division Build), and Three (3) New 2021-2022 <sup>3</sup>/<sub>4</sub> Ton Crew Cab

(4 Door) Full Size Pickup Trucks (Street And Alley Division Builds)

The changes, clarifications, omissions, additions, and/or alterations in, on, and to the bid information and specifications shall apply to the Invitation For Bid submitted for and to the project indicated above. Except as modified by this Addendum Number Two, all of the terms and provisions of the Invitation for Bid for the above listed project remain in full force and effect. This Addendum Number One supersedes all previous instructions pertaining to the items listed:

#### **BID SCHEDULE UPDATES:**

BID DUE DATE (CLARIFICATION): <u>WEDNESDAY THURSDAY</u>, APRIL 14, 2021 TIME: 2:00 PM

#### **SPECIFICATIONS:**

Updated Specifications are included with this Addendum Two, for use by bidders.

Additions and Clarifications will be made in **BOLD & UNDERLINED**, deletions will be made in **RED & STRIKETHROUGH**.

Bidders shall utilize the specifications from the most recently issued Addendum for their Bid submission. When the City conducts a review of the submitted bids, the last issued Bid Specifications (whether from the Original Bid, or from subsequent Addenda) are the **ONLY** specifications the City will review. Bidders are instructed to ensure that their final marked Bid Line Item Specification submission is from the last issued Addendum.

## ADDENDUM TWO ACKNOWLEDGED:

BY					TITL	E								
(Addendum	<u>must</u>	be	signed	and	returned	with	bid	or	receipt	of	the	addendum	<u>must</u>	be
acknowledged on the Invitation to Bid).														

REMAINDER OF PAGE INTENTIONALLY LEFT BLANK

### **ADDENDUM TWO REVISED SPECIFICATIONS**

Bidders <u>shall</u> select  $\underline{Y}$  to indicate  $\underline{YES}$  to meeting the Line Item Specification/Scope of Work, or  $\underline{N}$  to indicate  $\underline{NO}$  to meeting the Line Item Specification/Scope of Work. Bidders shall submit any Bid Exceptions or Substitution Requests in accordance with the instructions on Page 1 of this Bid. If a Bidder does not indicate  $\underline{Y}$  or  $\underline{N}$  on a Line Item, the City will assume that you do not meet the Line Item Specification/Scope of Work Description. If you do not clearly mark  $\underline{Y}$  or  $\underline{N}$ , or mark both  $\underline{Y}$  &  $\underline{N}$  the City will assume that you do not meet the Specification. BIDDERS ARE INSTRUCTED TO RETURN THE MARKED LINE ITEMS SPECIFICATIONS WITH THEIR BID SUBMISSION FOR REVIEW BY THE CITY.

#### MINIMUM SPECIFICATIONS FOR

## ONE (1) NEW 2021-2022 ¾ TON CREW CAB (4 DOOR) FULL SIZE PICKUP TRUCK, 4X4 WITH A 6-FOOT BOX WITH A FLEET WORK TRUCK PACKAGE (TRAFFIC DIVISION BUILD)

#### **GENERAL DESCRIPTION:**

Y	N	1.	Crew Cab (4 door)
			` '

- Y N 2. GVWR 9.900 Lbs.
- Y N 3. Engine 6.0L V-8 320 Horsepower with most available torque for horsepower range.
- Y N 4. Permanent anti- freeze protection to -30 F.
- Y N 5. Unleaded Gasoline with 30-gallon tank.
- Y N 6. Engine heater installed.
- Y N 7. Power steering & hood release in cab.
- Y N 8. High output alternator and 750 cold cranking amp battery.
- Y N 9. Automatic Transmission with overdrive and tow/haul mode transmission cooler.
- Y N 10. Black wall all terrain tires, steel wheels with full size spare as required for GVWR.
- Y N 11. Brakes- power, heavy duty with (4) wheel Anti-lock.
- Y N 12. Axle Ratio 3.73, available under carriage skid plates that are factory installed.
- Y N 13. Manual or electric shift transfer case.
- Y N 14. Differential heavy-duty automatic locking rear or electronic locking with switch in dash.
- Y N 15. Two (2) sets of keys.
- Y N 16. Black sprayed in bed liner to include top rail of box and inside of tailgate and top edge of tailgate or top rail caps accepted.
- Y N 17. Exterior color of vehicle to be white.
- Y N 18. Bluetooth.
- Y N 19. AM/FM Radio, Cigarette lighter or power port for cell phone.
- Y N 20. Interior: Gray. Seats cloth, 40/20/40 split bench front with saddle blanket seat covers provided and installed front and rear seats.
- Y N 21. Heavy duty Rubber floor covering and floor mats.
- Y N 22. Electric windows and door locks
- Y N 23. Standard rearview mirrors.
- Y N 24. Cruise control.
- Y N 25. Standard heat and defrost and air-conditioning.

- Y N 26. Factory trailer brake controller.
- Y N 27. Tow Package, Heavy duty trailer hitch platform and 2 ½ inch receiver, seven wire harness (to include wires for park lamps, right and left turn signals, electric brake lead, battery power and ground) with independent fused trailering circuits to a 7-way sealed connector and reducer sleeve down to 2-inch.
- Y N 28. Back up alarm
- Y N 29. Back up camera and sensors.
- Y N 30. Factory installed running boards.
- Y N 31. Toolbox installed in bed. Weatherguard Model 127-0-02, or approved equal.
- Y N 32. Remove two-way radio system from 5771 and install in this truck to switch power. **Existing** components shall be re-used for the new installation.
- Y N 33. Two front grill mounted amber/white LED flashing lights, and two rear taillight LED amber/white inserts flashing lights wired to ignition power to factory supplied up fitter switch in cab.
- Y N 34. A list of manufacturer's standard equipment must be attached with this bid for the vehicle you are bidding. <u>Attached</u>
- Y N 35. A copy of the warranty for this vehicle is attached.
- Y N 36. Parts, Service, Electrical Schematics, and Operator Manuals or CD's must be provided for the vehicle being bid.
- Y N 37. Title must be Made out to the City of Cheyenne, WY and delivered to the City of Cheyenne.

(END - TRAFFIC DIVISION BUILD)

#### MINIMUM SPECIFICATIONS FOR

## ONE (1) NEW 2021-2022 34 TON REGULAR CAB FULL SIZE PICKUP TRUCK, 4X4 WITH A 6-FOOT BOX WITH A FLEET WORK TRUCK PACKAGE (FACILITIES MAINTENANCE DIVISION BUILD)

#### **GENERAL DESCRIPTION:**

Y	N	1.	Regular	Cab ( <u>2</u> door)	)
---	---	----	---------	----------------------	---

- Y N 2. GVWR 9,900 Lbs.
- Y N 3. Engine 6.0L V-8 320 Horsepower with most available torque for horsepower range.
- Y N 4. Permanent anti- freeze protection to -30 F.
- Y N 5. Unleaded Gasoline with 30-gallon tank.
- Y N 6. Engine heater installed.
- Y N 7. Power steering & hood release in cab.
- Y N 8. High output alternator and 750 cold cranking amp battery.
- Y N 9. Automatic Transmission with overdrive and tow/haul mode transmission cooler.
- Y N 10. Black wall all terrain tires, steel wheels with full size spare as required for GVWR.
- Y N 11. Brakes- power, heavy duty with (4) wheel Anti-lock.
- Y N 12. Axle Ratio 3.73, available under carriage skid plates that are factory installed.
- Y N 13. Manual or electric shift transfer case.
- Y N 14. Differential heavy-duty automatic locking rear or electronic locking with switch in dash.
- Y N 15. Two (2) sets of keys.
- Y N 16. Black sprayed in bed liner to include top rail of box and inside of tailgate and top edge of tailgate or top rail caps accepted.
- Y N 17. Exterior color of vehicle to be white.
- Y N 18. Bluetooth.
- Y N 19. AM/FM Radio, Cigarette lighter or power port for cell phone.
- Y N 20. Interior: Gray. Seats cloth, 40/20/40 split bench front with saddle blanket seat covers provided and installed.
- Y N 21. Heavy duty Rubber floor covering and floor mats.
- Y N 22. Electric windows and door locks
- Y N 23. Standard rearview mirrors.
- Y N 24. Cruise control.
- Y N 25. Standard heat and defrost and air-conditioning.
- Y N 26. Factory trailer brake controller.
- Y N 27. Tow Package, Heavy duty trailer hitch platform and 2½ inch receiver, seven wire harness (to include wires for park lamps, right and left turn signals, electric brake lead, battery power and ground) with independent fused trailering circuits to a 7-way sealed connector and reducer sleeve down to 2-inch.
- Y N 28. Back up alarm
- Y N 29. Back up camera and sensors.
- Y N 30. Factory installed running boards.

- Y N 31. Amber strobe light (Federal Signal Permanent Mount #454201<u>HL</u>-02 or approved equal) mounted to top center of cab wired to toggle switch ignition power in dash. <u>If desired, light may be mounted to vehicle via Buyers Model 8895152 light bracket, or approved equal.</u>
  Bracket to be installed at 3<sup>rd</sup> Brake Light location,
- Y N 32. Front grill mounted amber LED flashing lights and rear taillight LED amber inserts flashing lights wired to ignition power to factory supplied up fitter switch in cab. Rear taillight LED flashing lights may be mounted on the tailgate. If mounted on the tailgate, they shall be mounted at equal height or higher than the tailgate handle, and shall be mounted as wide/far apart as possible. The electrical connections shall be made with a weather resistant quick disconnect plug, to allow tailgate removal if required.
- Y N 33. A list of manufacturer's standard equipment must be attached with this bid for the vehicle you are bidding. <u>Attached</u>
- Y N 34. A copy of the warranty for this vehicle is attached.
- Y N 35. Parts, Service, Electrical Schematics, and Operator Manuals or CD's must be provided for the vehicle being bid.
- Y N 36. Title must be Made out to the City of Cheyenne, WY and delivered to the City of Cheyenne.

(END – FACILITIES MAINTENANCE DIVISION BUILD)

#### MINIMUM SPECIFICATIONS FOR

## THREE (3) NEW 2021-2022 ¾ TON CREW CAB (4 DOOR) FULL SIZE PICKUP TRUCK, 4X4 WITH A 6-FOOT BOX WITH A FLEET WORK TRUCK PACKAGE (STREET AND ALLEY DIVISION BUILDS)

#### **GENERAL DESCRIPTION:**


Y	N	1.	Crew	Cab (	(4 door)	)

- Y N 2. GVWR 9,900 Lbs.
- Y N 3. Engine 6.0L V-8 320 Horsepower with most available torque for horsepower range.
- Y N 4. Permanent anti- freeze protection to -30 F.
- Y N 5. Unleaded Gasoline with 30-gallon tank.
- Y N 6. Engine heater installed.
- Y N 7. Power steering & hood release in cab.
- Y N 8. High output alternator and 750 cold cranking amp battery.
- Y N 9. Automatic Transmission with overdrive and tow/haul mode transmission cooler.
- Y N 10. Black wall all terrain tires, steel wheels with full size spare as required for GVWR.
- Y N 11. Brakes- power, heavy duty with (4) wheel Anti-lock.
- Y N 12. Axle Ratio 3.73, available under carriage skid plates that are factory installed.
- Y N 13. Manual or electric shift transfer case.
- Y N 14. Differential heavy-duty automatic locking rear or electronic locking with switch in dash.
- Y N 15. Two (2) sets of keys.
- Y N 16. Black sprayed in bed liner to include top rail of box and inside of tailgate and top edge of tailgate or top rail caps accepted.
- Y N 17. Exterior color of vehicle to be white.
- Y N 18. Bluetooth.
- Y N 19. AM/FM Radio, Cigarette lighter or power port for cell phone.
- Y N 20. Interior: Gray. Seats cloth, 40/20/40 split bench front with saddle blanket seat covers provided and installed front and rear seats.
- Y N 21. Heavy duty Rubber floor covering and floor mats.
- Y N 22. Electric windows and door locks
- Y N 23. Standard rearview mirrors.
- Y N 24. Cruise control.
- Y N 25. Standard heat and defrost and air-conditioning.
- Y N 26. Factory trailer brake controller.
- Y N 27. Tow Package, Heavy duty trailer hitch platform and 2 ½ inch receiver, seven wire harness (to include wires for park lamps, right and left turn signals, electric brake lead, battery power and ground) with independent fused trailering circuits to a 7-way sealed connector and reducer sleeve down to 2-inch.
- Y N 28. Back up alarm
- Y N 29. Back up camera and sensors.
- Y N 30. Factory installed running boards.

- Y N 31. Remove two-way radio systems from 5729, 5730, and 5770 and install in new trucks to switch power. Existing components shall be re-used for the new installation.
- Y N 32. Two front grill mounted amber/white LED flashing lights, two side mounted amber/ white LED flashing lights, and two rear taillight LED amber/white inserts flashing lights wired to ignition power to factory supplied up fitter switch in cab. If mounted on the tailgate, they shall be mounted at equal height or higher than the tailgate handle, and shall be mounted as wide/far apart as possible. The electrical connections shall be made with a weather resistant quick disconnect plug, to allow tailgate removal if required. The side mounted LED lights shall be installed on the horizontal frame of the message board (above the cab) at the point furthest forward (towards the front of the cab).
- Y N 33. A list of manufacturer's standard equipment must be attached with this bid for the vehicle you are bidding. Attached
- Y N 34. A copy of the warranty for this vehicle is attached.
- Y N 35. Parts, Service, Electrical Schematics, and Operator Manuals or CD's must be provided for the vehicle being bid.
- Y N 36. Title must be Made out to the City of Cheyenne, WY and delivered to the City of Cheyenne.

# MINIMUM SPECIFICATIONS FOR THREE LOW PROFILE TRUCK MOUNTED CHANGEABLE MESSAGE BOARDS

- Y N 1. Message Board shall be LiteReader Model 1030F-4, or approved equal.
- Y N 2. 72" X 36" display size with power intergraded tilt frame operated inside cab of truck
- Y N 3. 75" X 41" X5" Cabinet size
- Y N 4. 3 lines of 10" characters full matrix display, 2 lines of 16" characters full matrix display, 1 line of 20" full matrix display full matrix display characters full matrix display
- Y N 5. Controller to be LCD Touch screen and Backlit Keypad with single button MUTCD Symbols and ability to create custom messages as needed mounted such to be used from drivers' seat position. Contact Randy Hickman for exact location of the placement 307-637-6324.
- Y N 6. Bottom of <u>horizontal mounting frame</u> of message board shall be <u>exactly</u> 2" above pickup truck roof/cab to accommodate low profile wind resistance. <u>See photo below for reference.</u>
- Y N 7. <u>Message board shall be mounted through bed floor, and attached to frame of vehicle.</u> Message board shall not be mounted to bed rails.

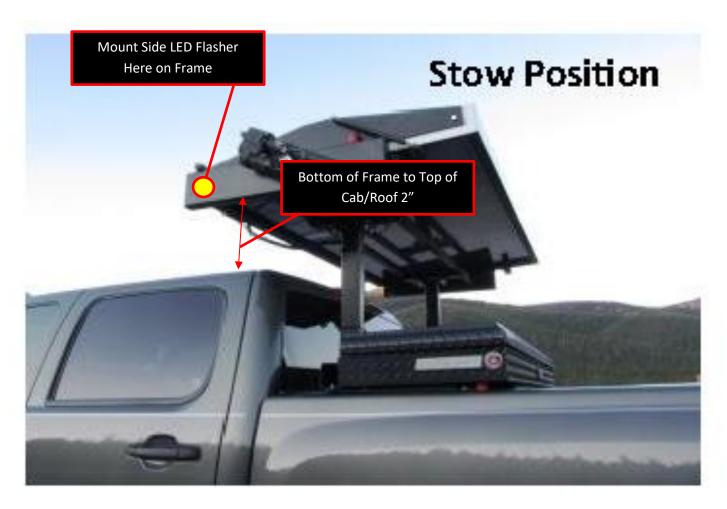

(END - STREET AND ALLEY DIVISION BUILDS)